



GRUNGE



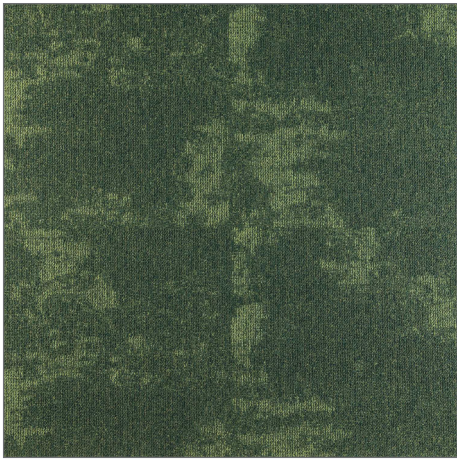


GRUNGE 7073

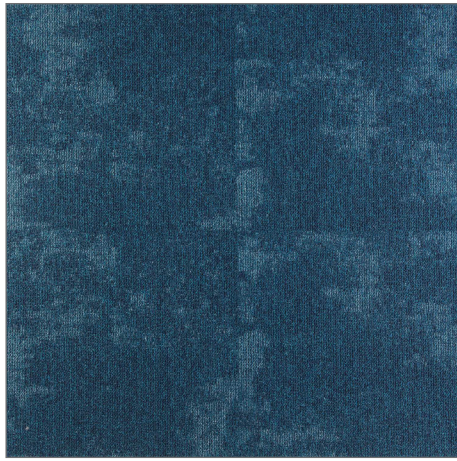


GRUNGE 6563



GRUNGE 6240

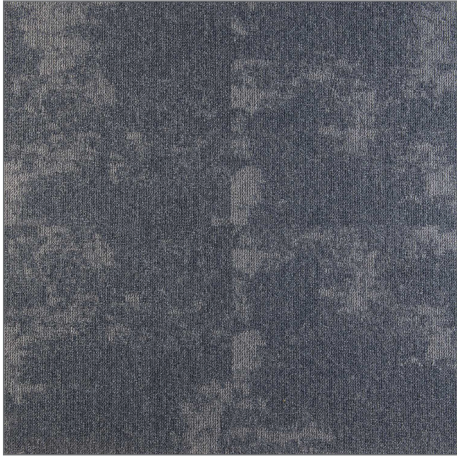

GRUNGE 6140

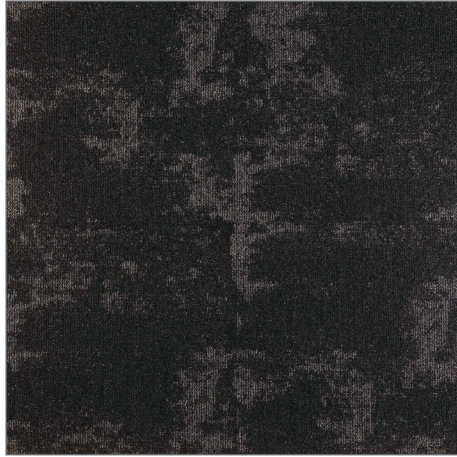

GRUNGE 5550



GRUNGE 5145



GRUNGE 5130



GRUNGE 5044



GRUNGE 4544



GRUNGE 4441



GRUNGE 4241



GRUNGE 3233

Technical details carpet tiles

Manufacturing type			tufted 1/10"	
Construction			structured loop pile	
Pile composition			100% PA 6	
Dye method			solution dyed	
Primary backing			non-woven	
Secondary backing			action backing	
Pile weight	ISO 2424	g/m ²	650	(+/-)
Total weight	ISO 8543	g/m ²		(+/-)
Pile height	ISO 1766	mm	4,0	(+/-)
Total height	ISO 1765	mm	6,0	(+/-)
Tuft density	ISO 1763	/m ²	191.000	(+/-)
Width		cm	400	(+/-)
Classification	EN 1307		33	heavy commercial
Comfort rating	EN 1307		LC 1	
Castor chair	EN 985		A	intensive
Stair suitability	EN 1963		A	intensive
Fire resistance	EN 13501-1		Cfl-S1	glued
Permanent antistatic	ISO 6356	kV	≤ 2,0	
Transversal resistance	ISO 10965	Ω	≤ 10¹⁰	
Thermal resistance	ISO 8302	m ² /K/W	0,078	
Sound absorption	ISO 354	α _w		
Impact sound reduction	ISO 10140	ΔL _w	22 dB	
	ISO 10140	ΔL		(1000 Hz)
Light fastness	ISO 105 B02		≥ 6	
Rubbing fastness	ISO 105 X12		≥ 4-5	wet/dry
Water fastness	ISO 105 E01			colour/staining

